



# Roof Skirt 3239

	Size (ID) In.	Std Weight Lbs	304SS				
			20ga	20ga			
One piece	3	0.45	Std	Optional			
	4	0.62					
	5	0.84					
	6	1.12					
	7	1.35					
	8	1.63					
	9	1.94					
	10	2.26					
	11	2.47					
	12	2.97					
	13	3.30					
	14	4.41					
	15	5.10					
	16	5.60					
	17	6.10					
	18	6.74					
	Two pieces	19			7.25		
		20			7.68		
21		8.13					
22		8.94					
23		9.20					
24		11.25					


### One piece design Sizes 3" - 18"

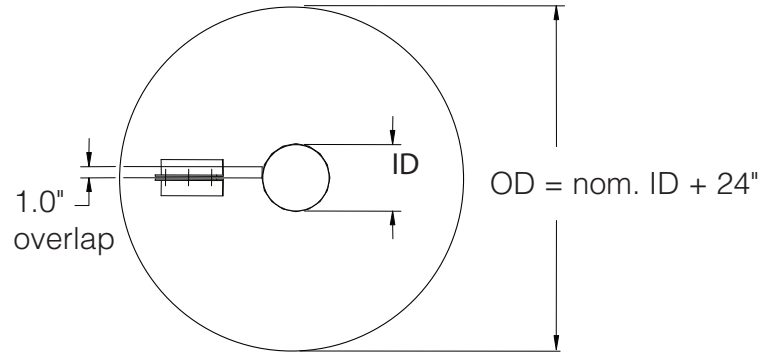

All slope angles approx. 27°

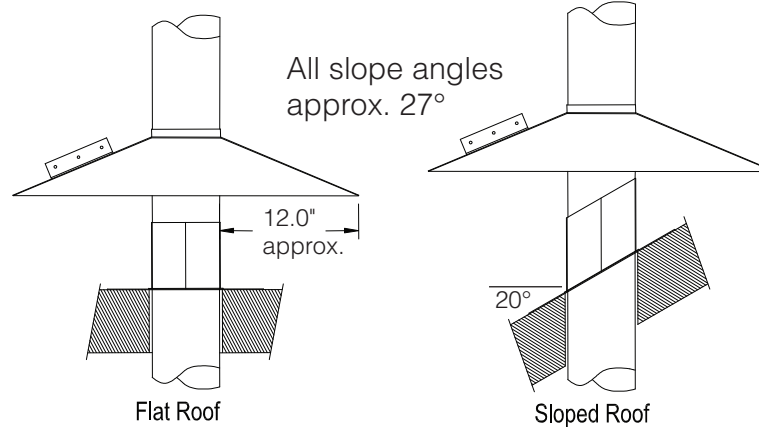

### Two piece design Sizes 19" - 24"

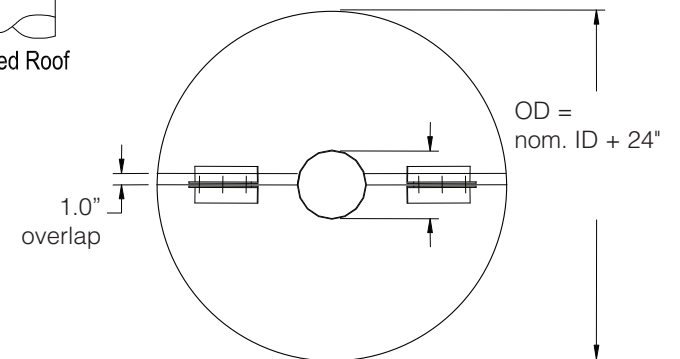

**Notes:**

- Roof flashing in sizes 3" - 18" is one piece with a caulked and bolted seam. Larger sizes are made in two halves, caulked and bolted at one seam and spot welded at other.
- 20° slope maximum.

Temperature Rating of Product Components						
° F	QF Roof Skirt		Sealants			
1100°	Galvanized Steel	Optional - 304SS	3M Scotch Seal Metal Sealant 2084	Optional - 3M Polyurethane Adhesive Sealant 560	Optional - Rock River Silicone Sealant	Optional - Red Devil HVAC/R High Temperature Silicone Sealant
500°						
390°						
250°						
194°						
0°						
-40°						
-60°						
						Optional - Epoxy - 3M DP 125 Gray Sealant

Additional Notes
At temperatures ranging between 390° F and 480° F, the zinc-iron alloy layers in galvanized steel will continue to provide a high level of protection from corrosion. However, there may be some peeling, changes in mechanical properties, and reduction in the corrosion protection. Recommended max. service temperature is 390° F.
Rock River Silicone Sealant and Red Devil HVAC/R High Temperature Silicone Sealant are not paintable
304SS: • bluing may occur at 800° F and above

Compliance / Rating of Product Components		
Product	Material	Compliance / Rating
QF Roof Skirt	Galvanized	ASTM A653 with a G-90 rating
	304SS	Finish meets ASTM A240
	316SS	Finish meets ASTM A240
3M Scotch Seal Metal Sealant 2084	Acetone blend	AAMA Specification 801.1
3M Polyurethane Sealant 560	Polyurethane	ASTM E 162, ASTM E 662, Bombardier SP 800-C
Rock River Sealant	100% Silicone	ASTM C920 Class 25, TT-S-00230C Class A and TT-S-001543A, FDA No 421 CFR 117.2600, conforms to FDA requirements
Red Devil HVAC/R High Temperature Sealant	Silicone	ASTM C920 Class 25, TT-S-00230C Class A and TT-S-001543A, CEBTP 432.6 140-2, Mil Spec 46106A, CGSB 19C9-9B, DIN 18540 Part 2, OREX 150031-2