


Rubber Hose, Clear 3280

| Inside Diameter | Approx. Weight lbs./ft. | Wall Thickness In. | CL Bend Radius In. | Compression Ratio | Negative Pressure In./hg | Working Pressure PSI |
|-----------------|-------------------------|--------------------|--------------------|-------------------|--------------------------|----------------------|
| 2" | .25 | .015 | 2.00 | 3:1 | 29.0 | 30.0 |
| 2.5" | .35 | .020 | 2.75 | 4:1 | 19.0 | 30.0 |
| 80mm | .40 | | 3.25 | 4:1 | 29.0 | 30.0 |
| 4" | .50 | | 3.75 | 4:1 | 24.0 | 22.0 |
| 5" | .60 | | 4.50 | 4:1 | 13.0 | 18.0 |
| 6" | .70 | | 5.25 | 4:1 | 8.0 | 15.0 |
| 7" | .80 | | 5.88 | 5:1 | 8.0 | 10.0 |
| 8" | .90 | | 6.50 | 5:1 | 2.0 | 7.0 |
| 9" | N/A | | N/A | 5:1 | N/A | N/A |
| 10" | 1.20 | | 7.50 | 5:1 | 2.0 | 7.0 |
| 12" | 1.40 | | 9.00 | 5:1 | 1.7 | 6.0 |
| 14" | 1.60 | | 12.00 | 5:1 | 1.1 | 5.0 |
| 16" | 1.80 | | 14.00 | 5:1 | 7.0 | 4.6 |
| 18" | 2.00 | | 16.00 | 5:1 | 0.5 | 4.1 |

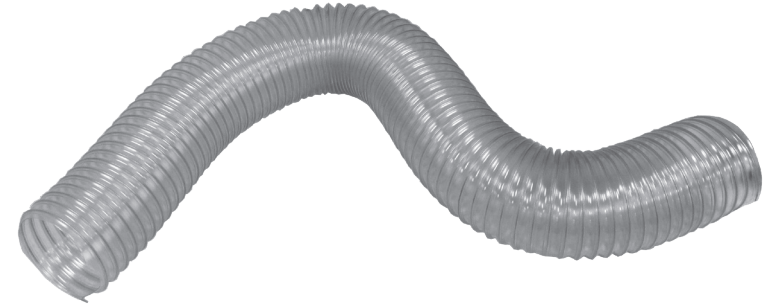

- Medium weight clear polyurethane hose reinforced with a bronze coated spring steel wire helix, manufactured with FDA acceptable materials
- Technical data based on 2 ft. straight lengths of hose @ 72°
- Temperature rating: -65° to 225°