


Flanged Duct Pipe 3201-XXLW

Size In.	ID In.	Length	Weight Lbs	Galvanized Steel				304SS (or 316SS)				
				22ga	20ga	18ga	16ga	22ga	20ga	18ga		
3	3.00	59	5.40									
4	3.86		7.05									
5	4.92		9.05									
6	5.92		10.73									
7	6.95		15.70	Std					Std			
8	7.97		17.75									
9	8.98		19.92									
10	9.98		23.10									
11	10.94		25.10			Optional				Optional		
12	11.95		27.75									
13	12.94		29.90			Optional				Optional		
14	13.93		36.80									
15	14.92		44.25									
16	15.91		47.15									
17	17.00		49.59		Std				Std			
18	17.92		51.00									
20	19.90		57.00									
22	21.93		63.50									
24	23.96		68.82									

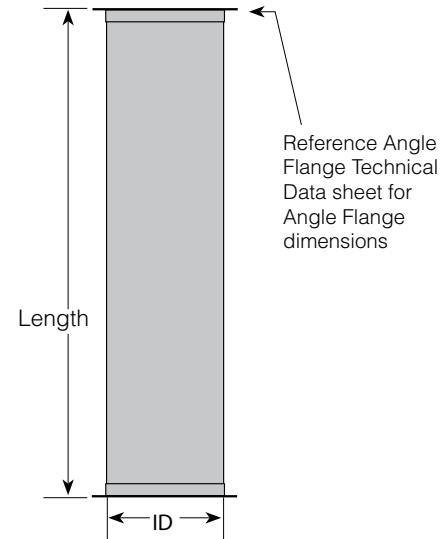

Construction:

Seam: Laser welded longitudinal seam

Flange:

- Angle flanged (AF) end can be modified to a 3/16" thick flat flange (FFL) to match your hole pattern or can be No Fitting (NF).
- Angle Flange is retained via 3/8" Van Stone lip. Angle Flange is floating /rotational for easier assembly.

Reference Nordfab's QF Machine Adapter Technical Data sheet for actual ID and OD dimensions.

Temperature Rating of Product Components		
° F	Flanged Pipe	
1100°		Optional - 304SS
390°	Galvanized Steel	
0°		
-60°		

Additional Notes
At temperatures ranging between 390° F and 480° F, the zinc-iron alloy layers in galvanized steel will continue to provide a high level of protection from corrosion. However, there may be some peeling, changes in mechanical properties, and reduction in the corrosion protection. Recommended max. service temperature is 390° F.
304SS: Bluing may occur at 800° F and above

Compliance / Rating of Product Components		
Product	Material	Compliance / Rating
Flanged Pipe	Galvanized	ASTM A653 with a G-90 rating
	304SS	Finish meets ASTM A240
	316SS	Finish meets ASTM A240