

# Flanged Duct Pipe

## 3201-XX16 - 16ga Galvanized or Stainless Steel

Ø Size In.	Length In.	Galvanized Steel Std Weight Lbs
26	59.00	113
28		123
30		133
32		140
34		152
36		160
38		170
40		180


**NOTE:** Reference Nordfab's QF Machine Adapter Technical Data sheet for actual ID and OD dimensions.

Temperature Rating of Product Components		
° F	Flanged Pipe, 16 gauge	
1100°	Galvanized Steel	Optional - 304SS
390°		
0°		
-60°		

Additional Notes
<ul style="list-style-type: none"> <li>At temperatures ranging between 390° F and 480° F, the zinc-iron alloy layers in galvanized steel will continue to provide a high level of protection from corrosion. However, there may be some peeling, changes in mechanical properties, and reduction in the corrosion protection. Recommended max. service temperature is 390° F.</li> <li>Weights are approximate.</li> </ul>

Compliance / Rating of Product Components		
Product	Material	Compliance / Rating
16ga Flanged Pipe	Galvanized	ASTM A653 with a G-90 rating
	SS304	Finish meets ASTM A240

**Construction**  
**Seam:** longitudinal seam is plasma welded.  
**Flanges:** Industry standard Angle Flange retained via 1/2" vanstone lip. Flange fully welded upon request.

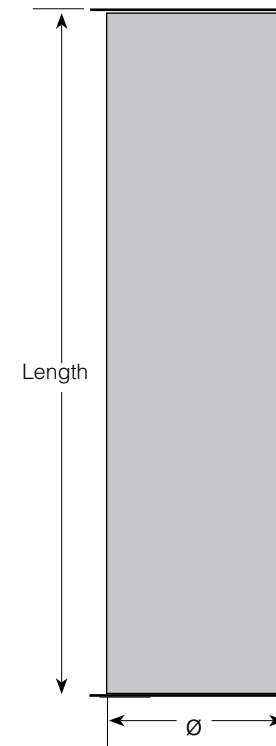

Reference Angle Flange [Technical Data sheet for Angle Flange](#) dimensions