

Pipe Hanger HJ 3265-HJ


Size (D) In.	Weight Lbs	Galvanized Steel		304SS	
		14ga	16ga	14ga	16ga
3	0.45	Std	Std	Std	Std
4	0.55				
5	0.65				
6	0.75				
7	0.85				
8	0.95				
9	1.05				
10	1.15				
11	1.30				
12	1.45				
13	1.60				
14	1.75				
15	1.90				
16	2.20				
17	2.50				
18	2.85				
20	3.40				
22	4.10				
24	5.00				

Temperature Rating of Product Components		
° F	Pipe Hanger HJ	
600°	Galvanized Steel	Optional - 304SS
500°		
390°		
158° (intermittent to 194°)		

Additional Notes

At temperatures ranging between 390° F and 480° F, the zinc-iron alloy layers in galvanized steel will continue to provide a high level of protection from corrosion. However, there may be some peeling, changes in mechanical properties, and reduction in the corrosion protection. Recommended max. service temperature is 390° F.

Compliance / Rating of Product Components		
Product	Material	Compliance / Rating
Pipe Hanger HJ	Galvanized	ASTM A653 with a G-90 rating
	304SS	Finish meets ASTM A240
	316SS	Finish meets ASTM A240

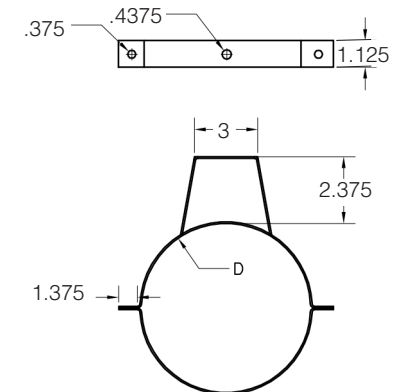

- Notes:**
- Bolts and nuts supplied with hanger, size 5/16 -18 x 1-3/4".